

# DOUBLE WALL ROUND DUCTS AND FITTINGS



AN ISO 9001: 2015 CERTIFIED COMPANY




# DOUBLE WALL ROUND DUCTS & FITTINGS



## STANDARD SIZES

Acoustical double wall duct

- ◆ Outer shell: Solid Galvanized Steel
- ◆ Inner shell: Perforated Galvanized Steel

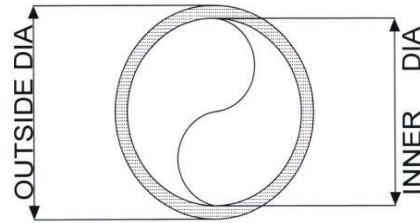

STANDARD SIZES (INSULATION THICKNESS 25 MM)					
DIAMETER	(mm)	SPIRAL DUCT		FITTINGS	
		INNER SHELL	OUTER SHELL	INNER	OUTER
INNER	OUTER	GAUGE	GAUGE	GAUGE	GAUGE
100	152	0.4	0.4	0.5	0.5
125	180	0.4	0.4	0.5	0.5
140	180	0.4	0.4	0.5	0.5
160	200	0.4	0.4	0.5	0.5
180	224	0.4	0.4	0.5	0.6
200	250	0.4	0.4	0.6	0.6
224	280	0.5	0.5	0.6	0.6
250	305	0.5	0.5	0.6	0.6
305	355	0.5	0.5	0.6	0.6
350	400	0.5	0.5	0.6	0.7
400	450	0.5	0.5	0.7	0.7
450	500	0.5	0.5	0.7	0.7
500	550	0.5	0.5	0.7	0.7
560	600	0.5	0.5	0.7	0.7
630	680	0.5	0.6	0.7	0.7
710	750	0.6	0.6	0.8	0.8
800	850	0.6	0.6	0.8	0.8
900	950	0.6	0.7	0.8	0.8
1000	1062	0.7	0.7	0.8	0.9
1120	1187	0.7	0.7	0.9	0.9
1250	1300	0.7	0.8	0.9	1.0



AN ISO 9001: 2015 CERTIFIED COMPANY




# DOUBLE WALL ROUND DUCTS & FITTINGS




## INSULATED FITTINGS

**INSULATED ELBOW**




TYPES:  
 REIA-5 GORES 90°  
 REIB-4 GORES 45°  
 REIC-2 GORES 15° 30° 60°

**INSULATED OFFSET**

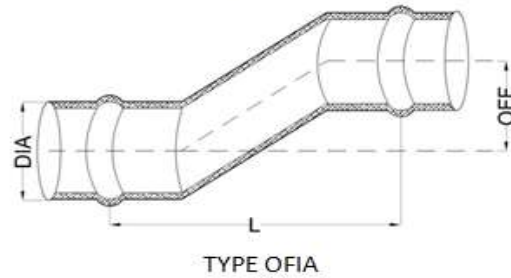


TYPE OFIA

**INSULATED REDUCER**

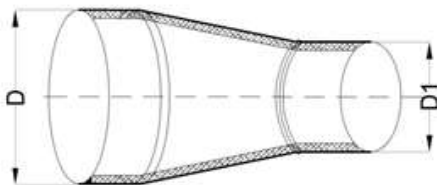


TYPE:  
 RRIA-CONCENTRIC  
 RRIB-ENCENTRIC

**INSULATED TEE**

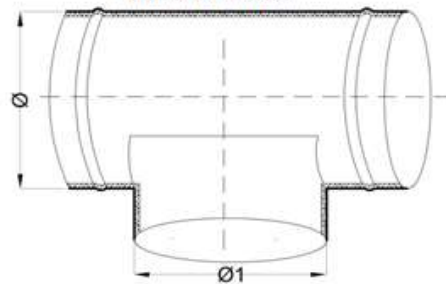


TYPES:  
 RTIA-CONCENTRIC  
 RTIB-ENCENTRIC

**INSULATED REDUCING TEE**

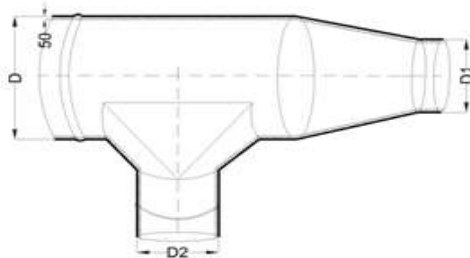

TYPE RRTIA (REDUCING)

**INSULATED LATERAL TEE**

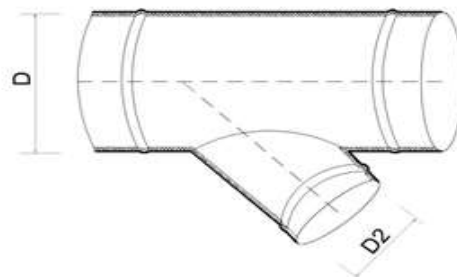

TYPE RLTTA (LATERAL)

